

MOUNTING SUPPORT FOR RAILINGS MS1



EASY TO ALIGN AND MOUNT



With this mounting support you can now easily mount balcony and stair railings. You save time and frustration, because the assembly can be carried out by a single person, once the component is hooked in.

Hanging and aligning

Depending on the size of the balcony where the support is to be mounted, fasten the mounting supports with screw clamps (min. 2 pieces required). Hook in and secure the railing, then align it using the fine adjustment crank. Once the railing is hooked into the mounting supports, the rest of the assembly can be carried out by a single fitter without any problems.



Drilling and setting anchors

Depending on the type of fastening, drill directly through the lugs or simply raise the railing to drill the holes. Thanks to the 3 axes you can easily adjust the position of the railing so that you have easy access to the drill holes.

Fastening

Now the railing can be fixed in place with ease and without stress. After assembly of the railing has been successfully completed, the mounting supports can be easily removed. Done! →


BENEFIT FROM THE ADVANTAGES OF THE MS1

- Alignment of railings by a single person
- Fine adjustment and secure retention of the component
- Suitable for the installation of balcony and stair railings
- Holder for round and square tube
- Stable with weight support or screw clamp

MOUNTING SUPPORT FOR RAILINGS MS1

CAN ALSO BE USED FOR

Stair railings: The mounting support is also a useful aid for the assembly of stair railings. When used correctly and professionally, even these types of railings can be assembled precisely and quickly by just one fitter.



3D

The mounting support is designed for a 3-axis alignment. In this way it is possible to align the mounting object in all directions.



Adjustment crank

The adjustment crank has been dimensioned extra long to provide sufficient clearance during adjustment.



Tensioning eyelets

These 2 eyelets provide additional stability during assembly. A rope or rubber band can be used to pull the mounting object in special cases.



Holder

The retainer carriage is equipped with 2 holders (round and square). A safety latch prevents the mounting object from accidentally sliding off.



Fastening

The mounting support is securely fastened with a screw clamp (not included in the scope of delivery) and thus firmly clamped to the balcony. When using screw clamps, the weight support is removed.




Stabiliser weight

If the screw clamp cannot be fitted, safe load carrying capacity can be achieved by placing a stabiliser weight. By repositioning, door and gate assembly can be carried out without weights.



Floor protection strips

Rubber strips at the bottom of the mounting support and the stabiliser weight prevent scratching of surfaces. This means that assembly is also possible on tiles or marble flooring without any problems.

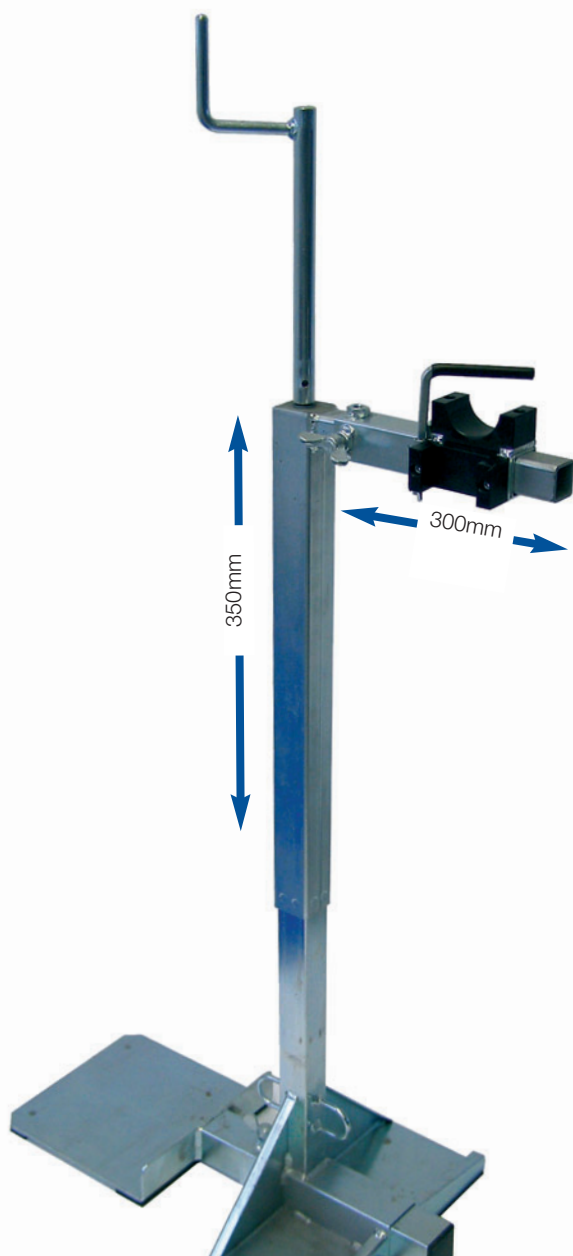

TECHNICAL DATA

- Material: S355 / galva. Zinc
- Dimensions (HxWxD): 1020 x 330 x 280 mm (without stabiliser weight)
- Weight: 10 kg (incl. stabiliser weight)

- Max. load: 82 kg (depending on fastening type)
- Height min.: 750 mm. Height max.: 1100 mm
- Height adjustable from 700 to 1100 mm